

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088047 A1

(51) International Patent Classification⁷: E02B 3/14

(21) International Application Number:
PCT/KR2004/000709

(22) International Filing Date: 29 March 2004 (29.03.2004)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2003-0020456 1 April 2003 (01.04.2003) KR

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and


(72) Inventor: LEE, Kang-San [KR/KR]; 490-1, simgok 2 Dong, Wonmigu, Buchen Si., Kyung Ki Do 420-829 (KR).

Published:
— with international search report

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: BLOCK FOR EMBANKMENT

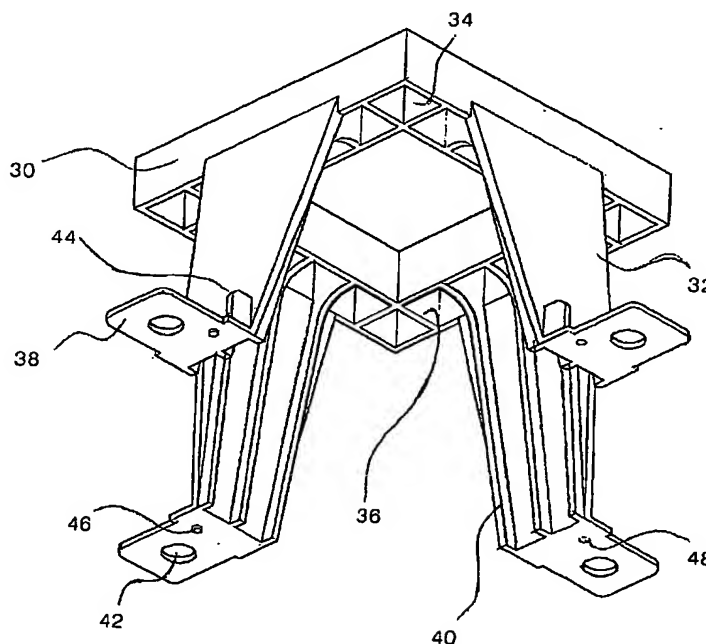

(57) Abstract: The present invention relates to an embankment block. There are provided a base frame 30 having a center with a through hole, and a plurality of connection members 32 that are downwardly extended from an outer surface of a rim of the base frame 30 wherein a front end of the same has an outwardly bent connection part 38. A plurality of through holes 34 are formed in a rim of the base frame 30 wherein said through holes 34 vertically pass through by the partition plate 36. The connection member 32 is widened in an outer direction of the rim of the base frame 30 and is slanted at a certain slope.